

High Frequency Portable X-ray Unit

PORTA100 HF



We proudly release the small sized and light weighted monobloc model, still having a high output by the improved 2 kW inverter system together with the x-ray tube of 20 kHU.

FEATURES

- High output of Max. 100 kV and Max. 30 mA is obtained by the 2kW inverter system.
- Size
Approximately 8.8 kg or 19.4 lbs
160 mm(H) x 161 mm(W) x 291 mm(L) or 6.29 in(H) x 6.33 in(W) x 11.45 in(L)
- KV and mAs selectors adopted a rotary switch system for easy and quick selection of kV and mAs.
- APR switch stores 8 examination parts and corresponding exposure data (kV/mAs) in order to avoid an annoyance from referring these data to the radiographic chart every time.
- Modular connector for DR system compatibility. (8P RJ-45)
- Automatic mAs control technique keeps always a real kV selected on the panel in order to obtain an expected film result even at the place where a certain drop of the line voltage occurs by the high impedance such as from the use of an extremely long extension cable.


Rating: 30 mA/40-66 kV/0.3-20 mAs
 20 mA/68-100 kV/0.3-20 mAs

SPECIFICATIONS

Generator	Inverter control type, 2 kW output
kV setting	40-100 kV (in 2 kV step). Rotary switch for digital display with 7 segment LED.
mAs selection	0.3-20 mAs (32 settings) 0.3, 0.4, 0.5, 0.6, 0.7, 0.8, 0.9, 1.0, 1.1, 1.2, 1.3, 1.4, 1.5, 1.6, 1.7, 1.8, 1.9, 2.0, 2.2, 2.5, 2.8, 3.2, 4.0, 5.0, 6.4, 7.0, 8.0, 9.0, 10, 12, 16, 20 mAs
X-ray tube	a) Focal spot: 1.2 x 1.2 mm b) Anode heat storage capacity: 20 kHU c) Target angle: 16 degrees
Total filtration	2.5 mm Al eq. at 100 kV
Collimator	A field lamp with a 30 sec. timer and cross indication line. A crossing point of 2 laser beams makes it easy to confirm a center of a radiographic field and exact SID even under the sunlight.
Line cable	6 meter long.
Hand switch	Two stage, deadman type with curled cable. (3 meter long at full extension)
Net weight (Approximately)	X-ray unit: 8.8 kg or 19.4 lbs Carrying case: 4 kg or 8.8 lbs
Line voltage adjustment	Automatic
Power requirement	100-120 V/30A or 200-240 V/16 A
Power capacity	115 V/35 A, 220 V/20 A, 240 V/18 A

SPECIFICATION & DESIGN ARE SUBJECT TO CHANGE WITHOUT NOTICE.

DRAWING

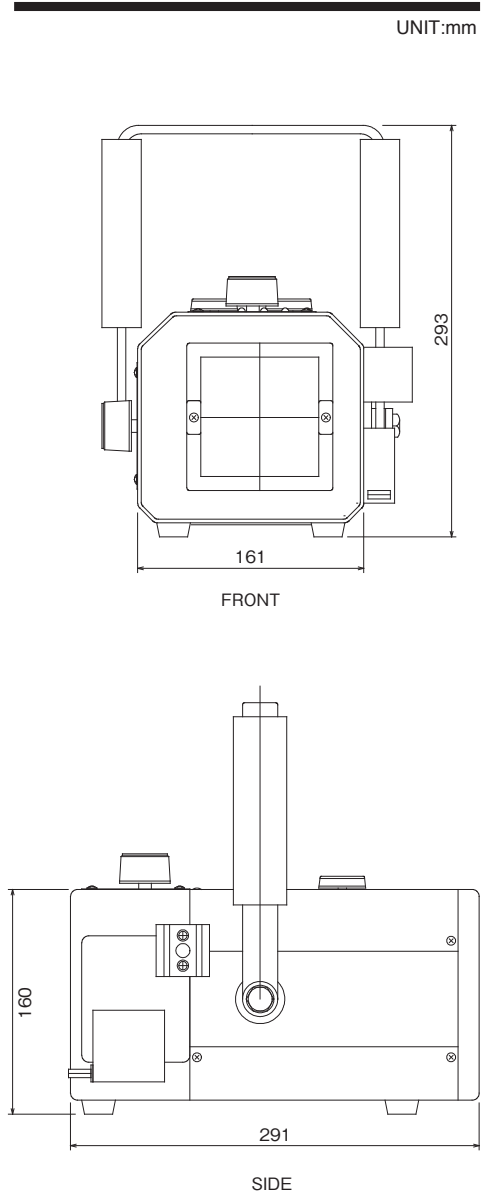

Made in Japan



JOB CORPORATION
 HEAD OFFICE
 JOB SHIN-YOKOHAMA BLD.,3-22-4 SHINYOKOHAMA,
 KOHOKU-KU, YOKOHAMA, KANAGAWA, 222-0033 JAPAN
 TEL +81-45-473-0113 FAX +81-45-473-0108
 URL: <http://www.job-image.com>

